

A2035-H

Positioning Product

Fleet management
 Asset Tracking
 Vehicle Tracking
 Personal Tracking
 People monitoring
 Portable Device

Integrated Antenna
 Low Power Consumption
 MEMS support
 A1035H backward compatible



Cost-efficient and complete – an SMT GPS antenna module

The A2035-H is Maestro Wireless Solutions answer to the most critical challenges in the GPS market: high integration, high performance, and a reduce time to market. The combination of a fully enhanced SiRFStar IV GPS engine and a custom-made high directional patch antenna ease engineers integration job in tough electrical environment. The A2035-H fully addresses the demand for extreme low power operation and ultra fast TTFF. Its highest sensitivity, allows for use in the most demanding conditions.

Features


- Lowest assembly cost
- Small footprint
- Ultra Low power consumption
- Bench marking sensitivity
- In-band jamming signal removal

Benefits

- SMT based integrated GPS antenna module
- 16.5 x 30.5 mm²
- 29 mA average tracking (full power mode)
- -163 dBm tracking
- up to 8 strongest interferes can be detected and excised

Positioning Receiver Portfolio

With the mission to support our customers in implementing GPS functionality into their systems, Maestro Wireless Solutions is offering a distinct product portfolio to address a wide area of applications. These range from traditional telematics solutions to latest highly integrated consumer devices, all of them having their special requirements towards a GPS module. Based on SiRFstarIII and now also SiRFstarIV chip sets, Maestro Wireless Solutions GPS module solutions address different specific needs and combine high performance, low power consumption, and simplified integration effort. Our modules comply with the RoHS standard and are 100% electrically and functionally tested prior to packaging, thereby assuring the guarantee of the highest quality products.

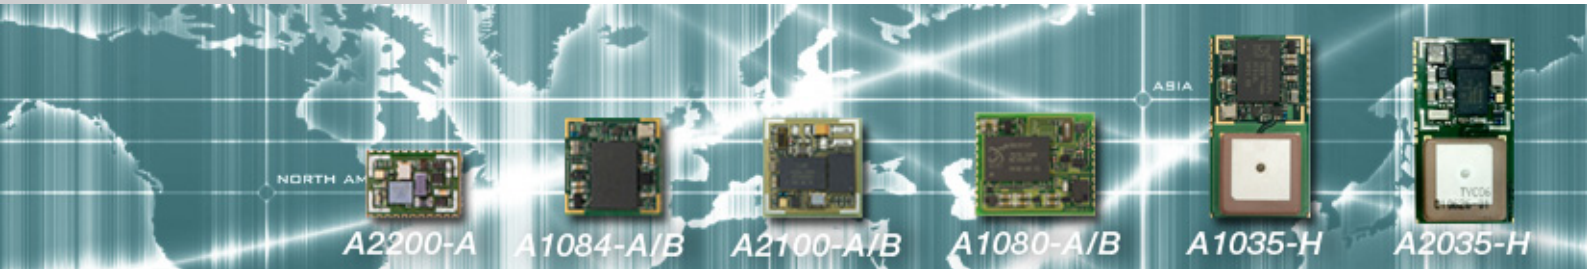

Ordering information:
A2035-H410
EVA2035-H Evaluation Board

Technical Details A2035-H

PERFORMANCE

Channels	48 parallel tracking
Correlators	400,000 plus
Frequency	L1 - 1,575 MHz
Sensitivity	
Tracking	- 163 dBm
Navigation	- 160 dBm
Acquisition (cold start)	- 148 dBm
Position Accuracy (horizontal)	< 2.5 m CEP (autonomous) < 2.0 m CEP SBAS
Time To First Fix	
Hot Start ¹⁾	< 1 s
Warm Start ²⁾	< 32 s
Cold Start ³⁾	< 35 s

COMMUNICATION

UART - NMEA (Default)	
NMEA message Switchable	GGA, RMC, GSA, GSV, VTG, GLL, ZDA
Baud rate Switchable	4,800 (default) 1,200 to 115.2k
Ports	Tx (NMEA output) Rx (NMEA input)
UART - SiRF Specific SSB/OSP	
SiRFbinary protocol	Protocol for SiRFstar product family up to SSIII
One Socket Protocol	Protocol extension for SiRFstarIV
Baud rate Switchable	57.6k (default) 1,200 to 115.2k
Ports	Tx (Binary output) Rx (Binary input)
SPI - NMEA/SiRF Specific	
Clock	Up to 6.8 MHz
Ports	DO (NMEA / Binary output) DI (NMEA / Binary input) SPI CLK (clock - input) SPI CS (chip select - input)

HIGHLIGHTS

SiRFNav™	High availability and coverage; improved TTFF in weak signal environments
SiRFaware™	Keeps module in a state of readiness for rapid navigation (hot start)
Jammer remover technology	Detects and removes up to 8 in-band jammers with minimal loss of sensitivity
A-GPS	Embedded Extended Ephemeris (SiRFInstantFix1) and Ephemeris Push support
MEMS I2C interface	Prepared to use additional sensor information for improved navigation
Flash-based design	Prepared to store configuration and calibration data and to allow firmware updates
Internal antenna	Best matched build-in antenna for easy integration

ENVIRONMENT


Temperature	
Operating	-40°C to +85°C
Storage	-40°C to +85°C
Humidity	
	Non condensing

POWER

Input voltage	3.0 to 3.6 VDC Nominal 3.3 VDC
Average current draw	
Full power mode (searching)	40 mA (TBC)
Full power mode (tracking)	29 mA (TBC)
PTF mode	4.1 mA (TBC)
MPM / SiRFaware	40 µA (TBC)
Hibernate	23.5 µA (TBC)
Antenna supply via Vant	
Voltage range	up to 5.0V
Max. allowed current ⁴⁾	50 mA

MECHANICAL

Dimensions	
L x W x H	30.5 x 16.5 x 5.0 mm ³⁾
L x W x H	1.2" x 0.65" x 0.2"
Weight	4.0 g / 0.14 oz.

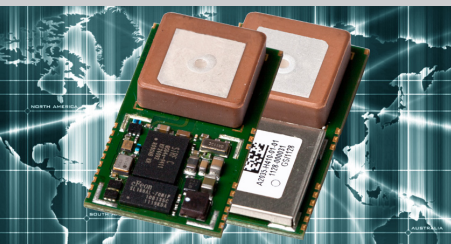

Contact Us:
Hong Kong: (852) 2869 0688
US: (1) 408 363 9389
contact@maestro-wireless.com

Maestro Wireless Solutions Ltd
3603-9, 36/F
118 Connaught Road West
Hong Kong
Tel: (852) 2869 0688
Fax: (852) 2525 4701
contact@maestro-wireless.com
www.maestro-wireless.com

¹⁾ The receiver has estimates of time/date/position and valid almanac and ephemeris data.
²⁾ The receiver has estimates of time/date/position and almanac.
³⁾ The receiver has no estimate of time/date/position, and no recent almanac.
⁴⁾ An external current limiter is suggested to avoid damage in fault conditions

The information provided herein is believed to be reliable at press time. Maestro Wireless Solutions assumes no responsibility for inaccuracies or omission. Maestro Wireless Solutions assumes no responsibility for the use of this information, and all such information shall be entirely at the users own risk. Prices and specifications are subject to change without notice. Maestro Wireless Solutions does not authorize or warrant any of its products for use in life support devices and/or systems. Images are for reference only.